

## Tii 220

### Coaxial Isolator

Galvanic Isolation of Both Shield and Center Conductor

Eliminates Ground Loops and Protects Equipment from "Hot" Coax Lines

Frequency Range 1MHz -1GHz

Insertion Loss < 0.5 dB

Robust Compact Design

Excellent RFI Shielding

Standard "F" Type Male-Female Connectors



Tii 220

The Tii 220 Coaxial Isolator provides galvanic isolation both the shield and center conductors of a standard 75 ohms coaxial system while maintaining low insertion loss for RF signals. The Isolator eliminates ground loops, and provides a degree of protection for electronic equipment from electrical transients and inadvertently "Hot" coax shield or center conductors. This helps prevent unwanted noise and picture interference in cable television systems. The Isolator's frequency range is suitable for IPTV installations utilizing HPNA or MoCA signaling over coaxial cable.

#### KEY PRODUCT BENEFITS

- ▶ Isolates Coax shield -- preventing unwanted ground loop current on the shield of the cable, which can cause noise and degrade picture quality.
- ▶ DC Block on center conductor protects electronic equipment from hazardous voltages and electrical transients.
- ▶ Ground Isolation > 2000V
- ▶ Center Conductor DC Block > 1000V
- ▶ Designed to work with today's high bandwidth networks.
- ▶ Product shows superior RF performance operating at a frequency range of 1 MHz-1 GHz. Maximum insertion loss is 0.5 dB. at 1 GHz.
- ▶ Robust design includes a metallic housing that provides excellent RFI shielding of >85 dB.
- ▶ Housing is environmentally sealed against moisture and humidity.
- ▶ Unit comes standard with "F" type Male-Female connectors.
- ▶ Isolation level between the service ground to customer ground is greater than 2000 V.

#### INDUSTRY STANDARDS

- ▶ Listed to UL 497C.




tii network technologies

141 Rodeo Drive  
Edgewood, NY 11717  
T. 631.789.5000  
Toll Free 888.844.4720  
F. 631.789.5063  
sales@tiinettech.com

[www.tiinettech.com](http://www.tiinettech.com)

# Tii 220

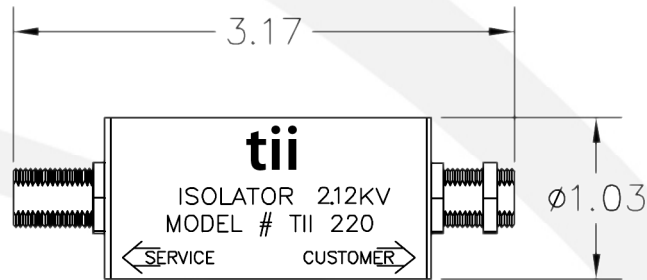

Dimensions are in Inches

## SPECIFICATIONS

### RF PERFORMANCE

Characteristic Impedance	75 ohms
Frequency Range	1 MHz - 1GHz
Insertion Loss	< 0.5 dB
Return Loss (5 MHz - 1 GHz)	> 24 dB

### GENERAL

Input - Output Shield Isolation	> 2,000 V
Input -- Output Center Isolation	> 1,000 V
Operating Temperature	(-40°F to +149°F)

## ORDERING INFORMATION

Model	Description
Tii 220	Coaxial Isolator
Standard Package:	50 pieces
Weight:	0.22 lbs. each